


ORAC[®]

DECOR

XTERIO COLLECTION





C800
200 x 5,5 x 6,5cm



C832
200 x 11,5 x 23cm



C820
200 x 20 x 16cm



C836
200 x 26 x 27cm



C890
200 x 16 x 21,5cm



CX826
200 x 9 x 9cm



C835
200 x 20 x 21,5cm



CX806
200 x 12 x 12cm



Coving


- FC01**
8 x 35 x 39cm
3⁵/₃₂" x 13²⁵/₃₂" x 15¹¹/₃₂"
- GB02**
7 x 49 x 40cm
2³/₄" x 19⁹/₃₂" x 15³/₄"
- structural max. 35kg*
- white wood grain finish
- GB03**
7 x 63 x 58cm
2³/₄" x 24¹³/₁₆" x 22⁷/₈"
- structural max. 75kg*
- white wood grain finish
- GB04**
5 x 74,5 x 77cm
2" x 29⁹/₁₆" x 30⁵/₁₆"
- structural max. 75kg*
- white wood grain finish

Brackets



- TF01**
7,7 x 12,3 x 35cm
- TF02**
7,7 x 12 x 10,5cm
- TF03**
7,8 x 10 x 20cm
- TF04**
7,7 x 25 x 20cm
- TF05**
10 x 13,5 x 25,5cm
- TF06**
15,5 x 7,5 x 17,5cm

Dentils

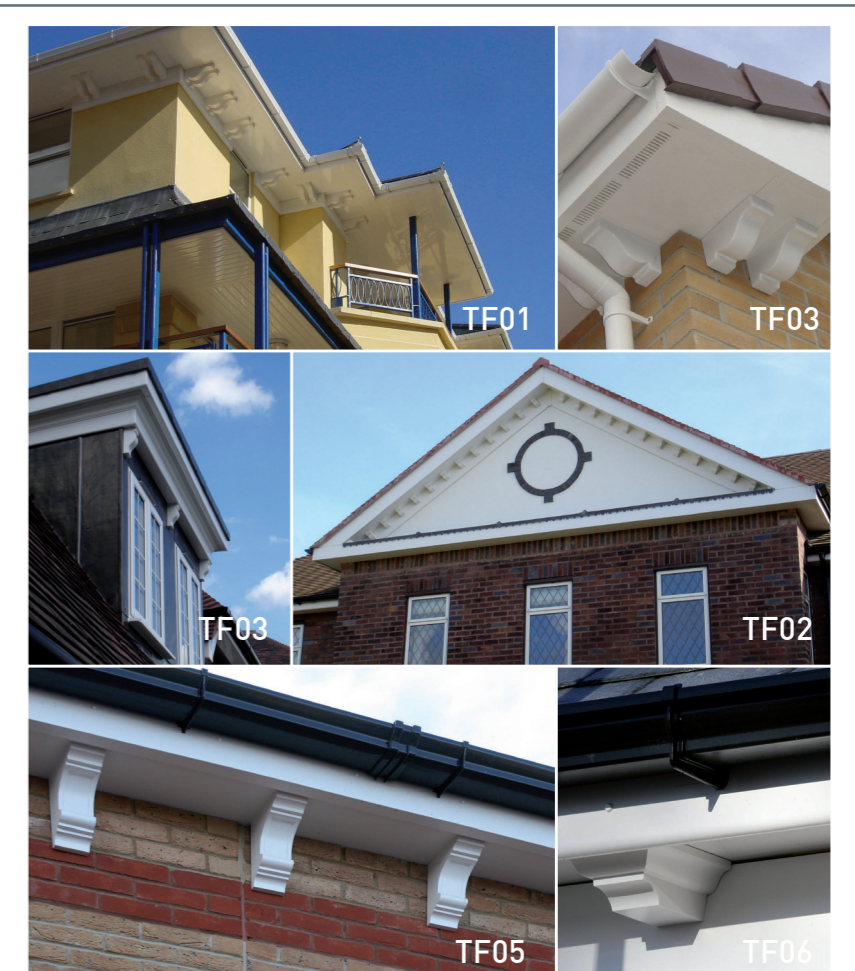

Columns

Have a look at our columns range at www.oracdecor.com



DecoFix



**Hydro
extra strong
installation
adhesive
for exterior**



**Extra
Adhesive
for perfect
jointing**

PUROTOUCH® / DUROPOLYMER®

For exterior applications, in damp environments and on non-porous surfaces, between the mouldings and the wall and/or ceiling. Any overspill needs to be painted to avoid discolouration.

FDP700 290 ml for 7 à 8 m

A glue for seam joints between the mouldings. Push the profiles strongly to each other and remove excess of DecoFix Extra preferably before hardening (wait at least two hours) with acetone or Synth Thinner. The adhesive can be painted after 24 hrs.

FX200 310 ml for min. 80m

FX210 80 ml for min. 20m



Full warranty coverage if provided instructions have been followed to the letter.





Recyclable.
ORAC manufacture
zero waste



CFC free

As the world leader in high quality architectural mouldings Orac has invested substantially to reduce their carbon footprint. Solar energy provides a large part of the energy needed to produce the products. All Duropolymer® products are 100% recyclable. None of the products contain toxic gasses and all of the products are produced without CFC's. Waste material is returned to a granular form and used to produce new products.



CHARACTERISTICS



Easy to cut
and install



Sharp lines
for an optimal
design



RESISTANT

Water resistant.
Resistant to most
common solvents
and moisture




Splitting
resistant, no
deterioration,

INSTALLATION



Use only DecoFix Hydro
and DecoFix Extra for
perfect installation
and warranty



Integrated
V-fix for
easy glueing

ORAC Headquarters
nv ORAC sa
Biekorfstraat 32
8400 Ostend, Belgium

T +32 (0)59 80 32 52
F +32 (0)59 80 28 10

info@oracdecor.com
www.oracdecor.com